


ACTIROX AF890




VSM ACTIROX

Grain type	Ceramic
Bond	Full-resin bonded
Color	Petrol
Backing	Vulcanised Fiber
Production width	58 in

Materials



Features



Maximum stock removal rate and a high initial aggressiveness thanks to the geometrically shaped ceramic grain. Ideal for machining stainless steels and superalloys with a cool cut and no discoloration thanks to the TOP SIZE additional grinding-active layer. AF890 achieves its full performance when used with angle grinders in the upper power range.


Grit range: ¹⁾



Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs.
- > More than twice as much stock removal compared to conventional ceramic grain abrasives.
- > Increase in productivity: more workpieces per unit of time due to fast cutting.
- > Extremely stable dimensions and a durable vulcanized backing satisfy the highest safety requirements.
- > The tailored and extremely hard back-up pad VSM TURBO PAD 3 leads to a further increase in stock removal.
- > Cool grinding processes and extended service lives thanks to the additional grinding-active layer VSM TOP SIZE.

Grain technology

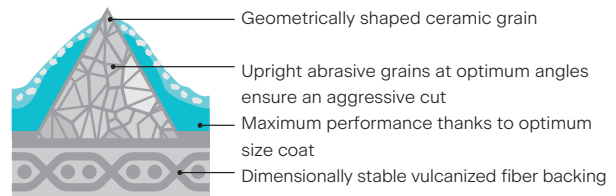

The plus in grinding performance

Practice has shown that ACTIROX abrasives have a **higher abrasive performance than comparable** conventional abrasives – with a consistent surface finish.

You achieve higher stock removal than you would expect with the specified grit size, but you do not get a rougher surface. A real plus for your grinding process.

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA
 T +1 800 737 0176 · F +1 636 272 6394
 us.info@vsmabrasives.com · www.us.vsmabrasives.com

¹⁾ Further grit sizes upon request. Subject to technical changes.

