




KV707X

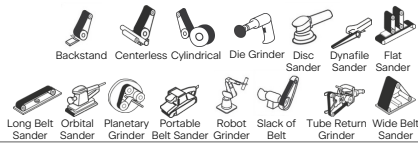


VSM NON-WOVEN (AO/SIC)

Grain type	Aluminum oxide / Silicon carbide
Bonding	Full-resin bonded
Color	Coarse = Brown (AO) Medium = Red (AO) Very fine = Blue (AO) Ultra fine = Grey (SIC)
Backing	X-Polyester
Flexibility	Sturdy
Production width	39 in

Materials



Features



AO = Aluminium oxide SIC = Silicon carbide

Robust surface conditioning material with reinforced, low-stretch backing made of robust polyester. Wide range of applications: From deburring work to the final finishing of surfaces. Ideal for satin finishing sheets on wide belt machines or for use with cooling lubricants in centerless processes.

Grit range:



Benefits

- > Uniform surface finish
- > Good adaptability
- > Extremely long service life
- > No clogging
- > Low extensibility
- > Waterproof

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA

T +1 800 737 0176 · F +1 636 272 6394

us.info@vsmabrasives.com · www.us.vsmabrasives.com

