

ZF713




VSM ZIRCONIA ALUMINA

Grain type	Zirconia alumina
Bonding	Full-resin bonded
Color	Dark blue
Backing	X-Polycotton
Flexibility	Sturdy
Production width	58 in

Materials



Features



Open-coated zirconia alumina fiber disc that grinds aggressively even with low contact pressure and ensures high stock removal rates. Ideal for use with angle grinders in the low to medium power range. Developed for surface grinding in tank construction and for grinding turbine components.


Grit range:¹⁾



Benefits

- > High stock removal rate
- > Self-sharpening effect constantly produces new sharp edges and thus enables a much better grinding performance
- > Low price-performance ratio
- > Special coat for hand-held machines
- > Durable tear-resistant vulcanized fiber backing
- > Cool cutting

Wear pattern of the grain

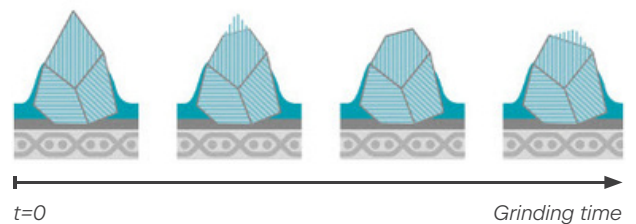

Aluminum oxide and zirconium oxide are finely dispersed throughout the microstructure of VSM ZIRCONIA ALUMINA. During the grinding process, the materials wear down alternately.

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA
 T +1 800 737 0176 · F +1 636 272 6394

us.info@vsmabrasives.com · www.us.vsmabrasives.com

¹⁾ Other grit sizes upon request. Subject to technical changes.

