

ZF714




VSM ZIRCONIA ALUMINA

Grain type	Zirconia alumina
Bonding	Full-resin bonded
Color	Blue
Backing	Vulcanized fiber
Production width	58 in

Materials



Features



Zirconia alumina fiber disc, with semi-open coating, for applications with medium contact pressure. Angle grinders even in the low to medium power range achieve aggressive grinding with high stock removal rates. Ideal for beveling unalloyed and stainless steels and for vehicle construction applications.


Grit range: ¹⁾



Benefits

- > High stock removal rate
- > Continual self-sharpening effect results in long-lasting high grinding capacity thanks to constant recreation of sharp grain points
- > Excellent price-performance ratio
- > Special coat for hand-held machines
- > Form-resistant vulcanized fiber backing

Wear pattern of the grain

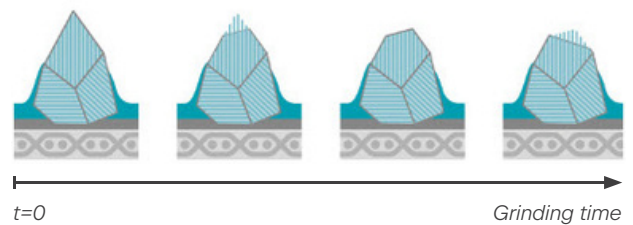

Aluminum oxide and zirconium oxide are finely dispersed throughout the microstructure of VSM ZIRCONIA ALUMINA. During the grinding process, the materials wear down alternately.

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA
 T +1 800 737 0176 · F +1 636 272 6394
 us.info@vsmabrasives.com · www.us.vsmabrasives.com

¹⁾ Further grit sizes upon request. Subject to technical changes.

