


ACTIROX

AF799




VSM ACTIROX

Grain type	Ceramic
Bond	Full-resin bonded
Color	Dark Petrol Blue
Backing	Vulcanized fiber
Production width	57 in.

Materials



Features




AF799 is characterized by its particularly aggressive cutting action and high stock removal. The strengths of the fiber disc lie in grinding out defects and leveling weld seams. In addition, AF799 achieves good stock removal while keep a cool cut – especially when grinding aluminum.

Grit range: ¹⁾

Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs
- > More than twice as much stock removal compared to conventional ceramic grain abrasives
- > Increase in productivity: More workpieces per unit of time due to more aggressive cutting
- > Curl resistant and durable vulcanized backing satisfy the highest safety requirements

Grain technology

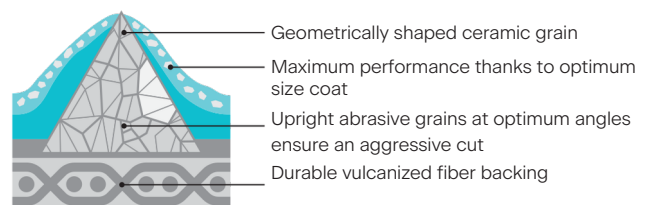

The plus in grinding performance

Practice has shown that ACTIROX abrasives have a higher abrasive performance than comparable conventional abrasives – with a consistent surface finish.

You achieve higher stock removal than you would expect with the specified grit size, but you do not get a rougher surface. A real plus for your grinding process.

VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366

T 800 737 0176

us.info@vsmabrasives.com · www.us.vsmabrasives.com

¹⁾ Further grit sizes upon request. Subject to technical changes.