


# KK524X




## VSM ALUMINUM OXIDE


Grain type	Aluminum oxide
Bonding	Full-resin bonded
Color	Black
Backing	X-Cotton
Flexibility	Sturdy
Production width	58 in

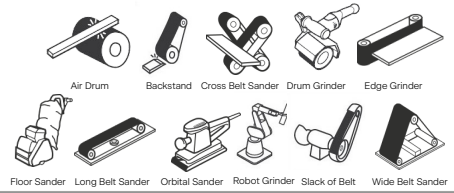

### Materials



### Features



Aluminum oxide abrasive with antistatic coating for universal use. Improves the service life, reduces electrostatic charge and clogging and optimizes the extraction of the grinding dust for dust-free workpiece surfaces.

### Grit range: <sup>1)</sup>



## Benefits

- > Provides dust-free workpiece surfaces for clean machines and workstations
- > Antistatic coating
- > Optimizes sanding dust removal

### VSM Abrasives Corp.

1012 East Wabash Street · O'Fallon, MO 63366 · USA  
 T +1 800 737 0176 · F +1 636 272 6394

us.info@vsmabrasives.com · [www.us.vsmabrasives.com](http://www.us.vsmabrasives.com)

<sup>1)</sup> P = Categorized according to the FEPA standard. Further grit sizes upon request. Subject to technical changes.

